

EIP-5000

XGA Conference DLP® Projector 5200 ANSI Lumens


- ▼ 5200 ANSI Lumens bright, at 90% uniformity, and a 1200:1 contrast ratio.
- ▼ XGA resolution. UXGA, SXGA+, SXGA, SVGA, VGA & MAC compatible.
- ▼ DLP® imaging technology delivers a “seamless” high contrast image.
- ▼ Power Zoom and Focus Lens. Optional Wideangle and Telephoto lenses.
- ▼ Horizontal & Vertical Lens Shift. H, V & Geometric Keystone Correction.
- ▼ Dual Lamp System provides redundancy and permits 4 brightness levels.
- ▼ Wireless/wired remote. Computer mouse control. 8-power digital zoom.
- ▼ RS-232 System and Network Control Compatible: Built in DB9 and RJ45.
- ▼ Smart data compression/expansion, and video scaling. sRGB Compatibility.
- ▼ Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- ▼ Converts Interlace video to Progressive scan. 2-3 Pulldown Support.
- ▼ Accepts Analog and Digital (DVI w/HDCP) Video input signals.
- ▼ Power Management, Keylock Security, and Custom Warmup Screen options.
- ▼ Unique Projector Stack Control and VideoWall Signal Division features.




Get the film-like imaging of DLP® technology
in a projector with conference room brightness
and built-in network control.

EIKI
Projectors... and more!

EIP-5000 5200 ANSI Lumens

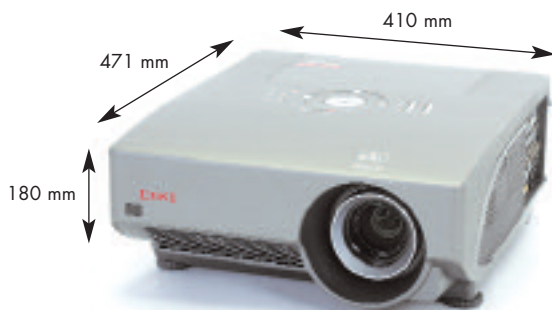

 Lamp Contains Mercury. Do not put in trash. Dispose-of-as Hazardous Waste, according to the laws in your jurisdiction.



INCLUDED ACCESSORIES:

Printed Quick Setup Guide and Owner's Manual. Quick Setup Guide, Owner's Manual and CAD Drawings on CD ROM. 3.6 M (12 ft.) AC Power Cord. Lens Cover. 3 M (9.8 ft.) VGA-type Computer Input Cable. Wireless/wired Remote with Mouse Control & 2 x AA batteries. Remote Mouse Receiver on 1.6 M (5.25 ft.) USB-A cable.

OPTIONAL ACCESSORIES:

Replacement Lamps. Soft Carry Bag with Wheels and Telescoping Handle. ATA-Style Shipping Case with Wheels and Telescoping Handle. Wideangle and Telephoto Lenses. Ceiling Mount. Ceiling Post and Plate. EZ-250 Local Control.

EIKI

Projectors... and more!

Specifications subject to change without notice.
©2007 EIKI International, Inc. Printed in Japan. 07/15/07

SPECIFICATIONS: EIP-5000

Screen Brightness	up to 5200 ANSI Lumens
Illumination Uniformity	90%
Size of Color Palette	16.7 Million
Contrast Ratio	1200:1
Horizontal Resolution	750 TV Lines (HDTV)
Projection Lamp	260 Watt UHP x 2
Estimated Lamp Life	up to 2500 Hours of Use
Imaging System	0.7" DDR DLP® Single DMD™
Color System	4-segment, 3X speed color wheel
Screen Pixels	786,432 (1024 x 768) in stripe configuration
Lens Type	Power Zoom and Focus
Lens Specs	Speed: f:1.8~2.0; FL:25.6~31.3 mm (1.01~1.23 in.)
Lens Ratios	Zoom Max:Min: 1.22:1; Throw:Width: 1.8~2.2:1
Image Diagonal	102~1270 cm (40~500 in.)
Image Width	0.81~10.16 m (2.5~33.3 ft.)
Throw Distance	1.5~13.4 m (4.8~44 ft.)
Front Elevation/Maximum Pitch	up to 9°
Vertical Anti Keystone	Power Lens Shift (Top:Bottom) 10:0~1:1
Horizontal Anti Keystone	Power Lens Shift (L:R~R:L) 6.5:3.5~3.5:6.5
Vertical Keystone Correction	Digital: up-to 30° up or down
Horizontal Keystone Correction	Digital: up-to 30° left or right
Geometric Keystone Correction	Digital
Scanning Frequency	Auto: H Sync. 15-126 kHz; V Sync. 43-200 Hz
Dot Clock	12~230 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control/Power Management	Full Function/Auto Shut-Off
Remote Projector & Mouse Control	Wireless/Wired x 1
Computer Mouse Control	via External IR Receiver on USB-A cable
Wired Remote Port	MiniStereo x 1
RS-232 Port	DB9 x 1
LAN Port	RJ45 x 1
Computer Native Resolution	1024 x 768 (XGA)
Computer: Compatibility	UXGA, SXGA+, SXGA, WXGA, XGA, SVGA, VGA, MAC & Workstation: SUN, SGI
Computer: Formats	1600 x 1200 through 640 x 480
Computer: Image Sizing	Normal, or Smart Compressed or Expanded
Video: Color Systems	NTSC/PAL/SECAM/NTSC 4.43/PAL-M/N
Video: Aspect Ratios Supported	4:3 and 16:9
Video: Image Resizing	Video Scaling Technology
Video: Resolutions Supported	
SDTV (Composite, S-Video, Component)	480i, 540p, 576i
EDTV (DVI w/HDCP)	480p, 576p
HDTV (DVI w/HDCP)	720p (50/60), 1035i (50/60), 1080i (50/60)
Signal Inputs:	
1. Computer: HD15 x 1 Analog RGB	
plus Audio: Stereo: MiniStereo x 1 (L & R)	
2a. either Computer: BNC x 5 (RGBHV)	
2b. or Video: BNC x 5 (RGBHV)	
or BNC x 3 (Composite/Component: Y,Pb/Cb,Pr/Cr)	
plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 3)	
3a. either Computer - Digital RGB: DVI-D x 1	
3b. or Video - Digital HDCP: (same) DVI-D x 1	
plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 2)	
4. Video : Composite - RCA x 1	
plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 5)	
5. Video : S-Video - S-Video x 1	
plus, Audio: Stereo: MiniStereo x 1 (L & R) (shared with input 4)	
Signal Outputs:	
Data/Video Monitor	HD15 x 1 on Input 1 (shared: Input 1 & 2)
Audio: Line	Stereo: MiniStereo x 1 (L & R) (follows video)
Audio: Amplifier	Stereo: 3 Watts
Audio: Built In Speakers	Stereo: 3.3 cm (1.3 in.) diameter (round) x 2
Operating Noise	as low as 35 dBA
Cabinet Size (HxWxD)	180 x 410 x 471 mm (7.1 x 16.1 x 18.5 in.)
Overall Size (HxWxD)	193 x 412 x 470 mm (7.6 x 16.2 x 18.5 in.)
Weight	14.83 kg (32.7 lb.)
Packaged Size (HxWxD)	390 x 560 x 620 mm (15.4 x 22 x 24.4 in.)
Packaged Weight	21 kg (46.3 lb.)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption	up to 650 W
Heat:	up to 559 Kcal/hr (2,218 BTU/hr)
Power Cord	3.6M (11.8') Type 3, Detachable
Safety Compliance	UL/cUL
Security Facilities	Kensington® Security Slot
Operating Temperature	5~40°C (41~104°F)
User Maintenance	Clean Air Vents/Covers, Replace Lamps

Talk to your EIKI Dealer... the "pro" in projectors.

Eiki Industrial Co., Ltd.
4-12 Banzai-cho, Kita-Ku, Osaka, Japan
Tel: (6) 6311-9479 • Fax: (6) 6311-8486
E-mail: japan@eiki.com
EIKI Web Site: <http://www.eiki.com>