

# EIP-WX5000

Widescreen 3 DLP® Projector  
5200 ANSI Lumens

*Get the film-like imaging of DLP® technology in a projector with conference room brightness and built-in network control.*

- ▼ 5200 ANSI Lumens bright, at 90% uniformity, and a 1800:1 contrast ratio.
- ▼ WXGA (16:10) resolution. UXGA~VGA, MAC and Workstation compatible.
- ▼ 3 DLP™ imaging technology delivers a “seamless” high contrast image.
- ▼ Power Zoom and Focus Lens. Optional Wideangle and Telephoto lenses.
- ▼ Horizontal & Vertical Lens Shift. H, V & Geometric Keystone Correction.
- ▼ Dual Lamp System provides redundancy and permits 4 brightness levels.
- ▼ Wireless/wired remote. Wireless remote mouse. Mechanical shutter.
- ▼ RS-232 System and Network Control Compatible: Built in D-sub 9 and RJ45.
- ▼ Smart data compression/expansion, and video scaling. sRGB Compatibility.
- ▼ Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- ▼ Converts Interlace video to Progressive scan. 2-3 Pulldown Support.
- ▼ Accepts Analog and Digital Video input signals up to 1080p.
- ▼ Power Management, Keylock Security, and Custom Warmup Screen options.
- ▼ Unique Projector Stack Control and VideoWall Signal Division features.





**EIKI**  
Projectors... and more!

# EIP-WX5000 5200 ANSI Lumens

## SPECIFICATIONS:

Screen Brightness	up to 5200 ANSI Lumens
Illumination Uniformity	90%
Color Reproduction	8-bit/16.7 Million Colors
Contrast Ratio	1800:1
Horizontal Resolution	550 TV Lines (HDTV)
Projection Lamp	280 Watt UHP x 2
Estimated Lamp Life	up to 3000 Hours of Use
Imaging System	0.65" DDR 3 DLP® DMD®
Screen Pixels	1,024,000 (1280 x 800) in stripe configuration
Lens Type	Power Zoom and Focus
Lens Specs	Speed: f:2.5; FL: 25.5~32.0 mm (1.00~1.26 in.)
Lens Ratios	Zoom Max:Min: 1.25:1; Throw:Width: 1.8~2.5:1
Image Diagonal	152.4~711.2 cm (60~280 in.)
Image Width	1.3~6.03 m (4.2~19.8 ft.)
Throw Distance	2.4~13.7 m (7.9~45 ft.)
Front Elevation/Maximum Pitch	up to 5° up/9° off the horizontal
Vertical Anti Keystone	Power Lens Shift (Top:Bottom) +/- 66%
Horizontal Anti Keystone	Power Lens Shift (L:R~R:L) +/- 35%
Vertical Keystone Correction	Digital: up to 40° up or down
Horizontal Keystone Correction	Digital: up to 30° left or right
Geometric Keystone Correction	Digital
Scanning Frequency	Auto: H Sync. 15-126 kHz; V Sync. 43-200 Hz
Dot Clock	12-230 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control/Power Management	Full Function/Auto Shut-Off
Remote Projector Control (with Mouse)	Wireless/Wired x 1
Wired Remote Port	MiniStereo x 1
RS-232 Port	D-sub 9 x 1
LAN Port	(10Base-T/100BaseTX) RJ45 x 1
Computer Native Resolution	1280 x 800 (WXGA)
Computer: Compatibility	UXGA, SXGA+, SXGA, WXGA XGA, SVGA, VGA, MAC & Workstation
Computer: Formats	1600 x 1200 through 640 x 480
Computer: Image Sizing	Normal, or Smart Compressed or Expanded
Video: Color Systems	NTSC/PAL/SECAM/NTSC4.43/PAL-M/N
Video: Aspect Ratios Supported	4:3 and 16:9
Video: Image Resizing	Video Scaling Technology
Video: Resolutions Supported	
SDTV (Composite, S-Video, Component)	480i, 540p, 576i
EDTV (DVI w/HDCP)	480p, 576p
HDTV (DVI w/HDCP)	720p/60, 1035i/60, 1080i/50/60, 1080p/50/60
Signal Inputs:	
HDMI	HDMI x 1
DVI-D(w/HDCP)	DVI-D x 1
plus Audio: Stereo:	MiniStereo x 1
Computer/Component 1:	D-sub 15 x 1
plus Audio: Stereo:	MiniStereo x 1
Computer/Component 2:	BNC x 5
plus Audio: Stereo:	MiniStereo x 1
S-Video	S-Video x 1
plus Audio: Stereo:	MiniStereo x 1
Composite	RCA x 1
plus Audio: Stereo:	MiniStereo x 1
Outputs	
Computer/Component	D-sub 15 x 1
Audio: Line	Stereo: MiniStereo x 1
Audio: Amplifier	Stereo: 3 Watts
Audio: Built In Speakers	Stereo: 3.4 x 6.8 cm (1.3 x 2.6 in.) (oval) x 2
Fan Noise	as low as 34 dBA
Cabinet Size (HxWxD)	190 x 500 x 637 mm (7.5 x 19.7 x 25.1 in.)
Weight	26.6 kg (58.6 lbs.)
Packaged Size (HxWxD)	400 x 720 x 870 mm (15.8 x 28.4 x 34.3 in.)
Packaged Weight	35 kg (77.2 lbs.)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption:	up to 755 W
Heat:	649 Kcal/hr (up to 2,578 BTU/hr)
Power Cord	1.8M (6.0') Type 3, Detachable
Electrical Safety Compliance	UL, cUL, IEC
Electromagnetic Compatibility	FCC Part 15 Class A, CE Mark
Security Facilities	Kensington® Security Slot
Operating Temperature	5~40°C (41~104°F)
User Maintenance	Clean Air Filter, Replace Lamps

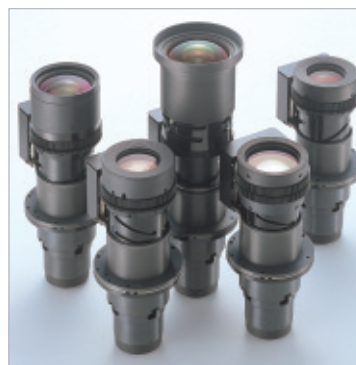

### INCLUDED ACCESSORIES:

Printed Quick Setup Guide and Owner's Manual. Quick Setup Guide, Owner's Manual and CAD Drawings on CD ROM. 1.8M (6.0 ft.) AC Power Cord. Lens Cover. VGA-type Computer Input Cable (D-sub 15). Wireless/wired Remote with Mouse Control & 2 x AA batteries. Remote Mouse Receiver on 1.6M (5.25 ft.) USB-A cable.

### OPTIONAL ACCESSORIES:

Replacement Lamps. Wideangle and Telephoto Lenses. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate.

Talk to your EIKI Dealer... the "pro" in projectors.



**Eiki Industrial Co., Ltd.**  
4-12 Banzai-cho, Kita-Ku, Osaka, Japan  
Tel: (6) 6311-9479 • Fax: (6) 6311-8486  
E-mail: japan@eiki.com  
**EIKI Web Site: <http://www.eiki.com>**

**EIKI**  
Projectors... and more!

Specifications subject to change without notice.  
©2008 EIKI International, Inc. Printed in Japan. 09/01/08