

LC-X80

XGA Boardroom Projector 6500 ANSI Lumens

- ▼ 6500 ANSI Lumens bright, at 90%+ uniformity, and a 2000:1 contrast ratio.
- ▼ A true portable/installation projector, engineered for extended use.
- ▼ 3 panel LCD imaging for rich, color saturated computer and video projection.
- ▼ XGA resolution. Smart data compression/expansion, and video scaling.
- ▼ Includes most professional input configurations, including 5BNC and DVI.
- ▼ Accepts analog and digital computer input, analog and digital w/HDCP video.
- ▼ Compatible with Computer sources up to UXGA, Video sources up to 1080p.
- ▼ Power zoom & focus. V & H power lens shift. V & H keystone correction.
- ▼ Optional Wideangle and Telephoto lenses. Quick Lens Change System.
- ▼ Quiet operation: fan noise as low as 31.8 dBA. Roll air filter.
- ▼ Wireless/wired remote with mouse. Up to 49x digital zoom.
- ▼ Converts Interlace to Progressive scan. 2-3 pulldown support.
- ▼ Variable Power Management Option. Optional Local or Remote Keylock.
- ▼ Custom Warmup Screen Image Option. Built-in Color Auto Picture Control.

Outstanding Features

1. Our brightest portable: 6500 ANSI Lumens!
2. New LCD panels deliver a remarkable 2000:1 contrast ratio.
3. New Inorganic imaging engine is optimized for extended use.
4. New self-advancing cartridge air filter reduces maintenance.
5. New horizontal lens shift and vertical projector orientation.
6. Compatibility up to analog UXGA, digital 1080p (psf/24/25/30).

Shown with Optional Lens






Get the rich color imaging of 3 panel LCD technology in an installation projector with Unparalleled brightness and compatibility.

EIKI
Projectors... and more!

LC-X80

6500 ANSI Lumens

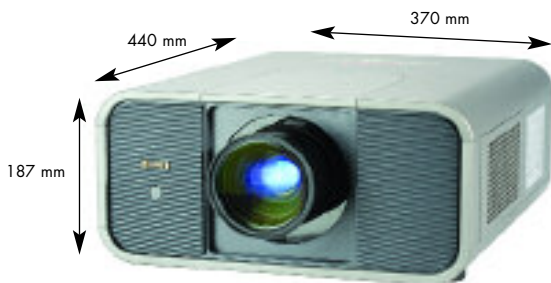

 Lamp Contains Mercury. Do not put in trash. Dispose-of-as Hazardous Waste, according to the laws in your jurisdiction.



INCLUDED ACCESSORIES:

Quick Start Guide. Owner's Manual on CD-ROM. AC Power Cord. VGA-type Computer Input Cable. Wireless/wired Remote with Mouse Control and Laser Pointer & 2 x AAA batteries. USB Cable for Computer Mouse control. Remote Control Cable, Lens Mount Attachment, Lens Light Block, Lens Spacer


OPTIONAL ACCESSORIES:

Replacement Lamp. Soft Carry Bag with Wheels and Telescoping Handle. ATA-Style Shipping Case with Wheels and Telescoping Handle. A Range of Wideangle and Telephoto Lenses. Ceiling Mount. Ceiling Post and Plate. 30 M (100') Wired Remote Cable. EZ-250 Local Control. PjNET Network Interface. NPC-1 Network Control. Replacement Air Filter Cartridge.

SPECIFICATIONS: LC-X80

Screen Brightness	up to 6500 ANSI Lumens (with AH-23081 lens)
Illumination Uniformity	90%+
Size of Color Palette	16.7 Million
Contrast Ratio	2000:1 (Full ON/OFF)
Horizontal Resolution	800 TV Lines (HDTV)
Projection Lamp	330 Watt NSHA
Estimated Lamp Life	Up to 3000 hrs
Imaging System	1.3" Inorganic PolySilicon active matrix TFT Panels x 3
Screen Pixels	1024 x 768 in stripe configuration
Total Pixels	2,359,296 ((1024 x 768) x 3)
Lens	Not Included
Image Diagonal	78.8~1016 cm (31~400 in.)
Image Width	0.63~8.2 m (2.07~26.7 ft.)
Throw Distance	See specifications of selected lens
Front Elevation	up to 6.5° up
Projector Orientation	Normal, Inverted, Straight Up, Straight Down
Vertical Anti Keystone	Power Lens Shift, Ratio (Top:Bottom) 10:0~1:1
Horizontal Anti Keystone	Power Lens Shift, Ratio (Left:Right) 2:3~3:2
Vertical Keystone Correction	Digital: up to 35° up or down.
Horizontal Keystone Correction	Digital: up to 15° left or right
Scanning Frequency	Auto: H Sync. 15-100 kHz; V Sync. 48-100 Hz
Dot Clock	180 MHz
Image Orientation	Normal, Reversed, Inverted
Local Control/Power Management	Full Function/Auto Shut-Off
Remote Projector & Mouse Ctrl	Wireless/Wired x 1
Ports:	Mouse: USB-B x 1, Control: DB9 x 1, Wired RC: MiniStereox1
Computer Native Resolution	1024 x 768 (XGA)
Computer: Compatibility	UXGA (analog only) SXGA+, WXGA, XGA SVGA, VGA & MAC
Computer: Formats	1600x1200 through 640 x 480
Computer: Image Sizing	Normal, or Smart Compressed or Expanded
Video: System Compatibility	NTSC/PAL/SECAM/NTSC 4.43/PAL-M/N
Video: Compatibility	480i/p, 575i/p, 720p, 1035i, 1080i-50/60 1080psf24/25/30 (digital only)
Video: Formats Supported	4:3 and 16:9
Video: Image Resizing	Video Scaling Technology
Video: Systems	Composite, S-Video, Component (Y,Pb/Cb,Pr/Cr) Inputs:
1a.	either Computer: HD15 x 1 RGB
1b.	or DVI-D x 1 Digital Computer or Video Input w/ HDCP
2a.	either Computer: BNC x 5 (RGBHV)
2b.	or Video: BNC x 3 (Composite/Component: Y,Pb/Cb,Pr/Cr)
3.	Video: RCA x 3 (Composite/Component: Y,Pb/Cb,Pr/Cr) S-Video x 1
Outputs:	
Computer: Monitor	HD15 x 1 on Input 1 (switchable)
Fan Noise	as low as 31.8 dBA
Size (HxWxD)	187 x 370 x 440 mm (7.36 x 14.56 x 17.32 in.) without lens & including height of leg (0.28 in 7mm)
Weight	11.7 kg (25.8 lbs.) (without lens)
Packaged Size (HxWxD)	388 x 492 x 630 mm (15.2 x 19.4 x 24.8 in.)
Packaged Weight	14.92 kg (32 lbs.)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption/Heat	490 W/1638 BTU/hr (413 Kcal/hr)
Power Cord	3 M (10') Type 3, Detachable
Electrical Safety Compliance	IEC/UL/cUL
Electromagnetic Compatibility	FCC Class B, CE Mark
Security Facilities	Kensington® Security Slot
Operating Temperature	5~40°C (41~104°F)
User Maintenance	Replace Air Filter Cartridge, Replace Lamp

Talk to your Eiki Dealer... the "pro" in projectors.



EIKI
Projectors... and more!

Specifications subject to change without notice.
©2007 Eiki International, Inc. Printed in Japan. 09/01/07

Eiki Industrial Co., Ltd.
4-12 Banzai-cho, Kita-Ku, Osaka, Japan
Tel: (6) 6311-9479 • Fax: (6) 6311-8486
E-mail: japan@eiki.com
EIKI Web Site: <http://www.eiki.com>